

EX3 Install

EX3 range install specification

The EX3 is an attractive and extremely versatile professional espresso machine. The EX3 is suitable for any kind of business with an espresso demand, whether an independent café or a national coffee shop chain. Ergonomics and user experience have also been key on this project. Following Crem's own standards of performance, the EX3 features innovative, highly tested technologies in order to deliver a superior in cup quality.





Standard Features

- Twin 1/2 turn rotary taps for smooth and precise control
- · Cool touch steam wands deliver enhanced safety in a busy enviornment
- Pressure switch control
- · Built-in rotatory pump
- · Pre-infuse chamber group head
- Volumetric dosing (5 keypad button)
- Group flush button
- 60mm single pressure gauge
- Group auto cleaning cycle
- Double pressure gauge for effective monitoring
- Takeaway group height allows for positioning and filling of up to 16oz cups
- Standard colours: White, black







DISPLAY FEATURES

- Maximum precision temperature control using PID technology
- Digital display with boiler temperature and shot counter
- Barista lights to beautifully illuminate your espresso

Model Details

Code	Variant	In the box	
C1EX3MC1B1	1 Group EX3 Mini Control High Group	1 x single portafilter, 1 x double portafilter, 1 x 0.55 metre water filter hose, 1 x 1.5 metre waste hose, 1 x power cable, 1 x espresso cup stand	
C2EX3MP1B2	2 Group EX3 Mini Display High Group	1 x single portafilter, 1 x double portafilter, 1 x 0.55 metre water filter hose, 1 x 1.5 metre waste hose, 1 x power cable, 2 x espresso cup stands	
C2EX3C1B2	2 Group EX3 Control High Group	1 x single portafilter, 2 x double portafilters, 1 x 0.55 metre water filter hose, 1 x 1.5 metre waste hose, 1 x power cable, 2 x espresso cup stands	
C2EX3P1B2	2 Group EX3 Display High Group	1 x single portafilter, 2 x double portafilters, 1 x 0.55 metre water filter hose, 1 x 1.5 metre waste hose, 1 x power cable, 2 x espresso cup stands	
C3EX3P1B2	3 Group EX3 Display High Group	1 x single portafilter, 3 x double portafilters, 1 x 0.55 metre water filter hose, 1 x 1.5 metre waste hose, 1 x power cable, 2 x espresso cup stands	



Welbilt reserves the right to make changes to the design or specifications without prior notice.



Email: sales.uk@welbilt.com


Tel: +44 (0) 1483 464 900







EX3 Install

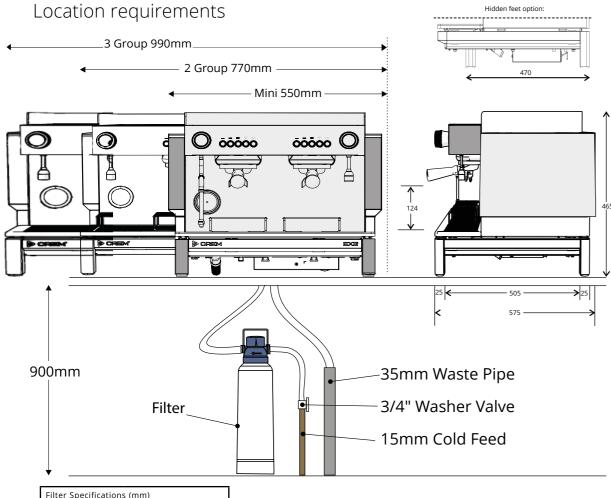

Filter Specifications (mm)		
WMMR	500 x 130	
WMLR	530 x 145	
WMXLR	530 x 145	
WM2XLR	600 x 185	


INSTALLATION NOTE:

Prior to any connection of either machine or water treatment unit, flush at least 25 litres from the water connection point to clear any plumbing residue from the site water supply.

PLEASE NOTE:

Ensure that the connected drain has a downward flow from the point of connection on the machine to avoid blockages.

Hole location for drain and services

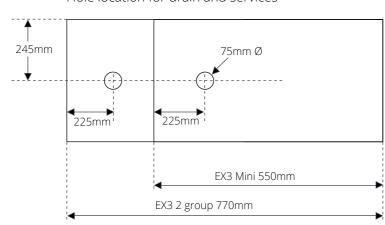

Welbilt reserves the right to make changes to the design or specifications without prior notice.

Welbilt UK Ltd Ashbourne House, The Guildway Old Portsmouth Road Guildford, GU3 1LR United Kingdom

Email: sales.uk@welbilt.com Tel: +44 (0) 1483 464 900

www.crem.coffee





EX3 Install

Installation check list

MODEL	SUPPLY	CONNECTION	POWER	WIDTH	DEPTH	HEIGHT	WEIGHT
1 Group EX3 Mini Control	1N ~ 220-240V	13A	2800W	550	575	465	48kg
2 Group EX3 Mini Display	1N ~ 220-240V	13A	2800W	550	575	465	50kg
2 Group EX3 Control	1N ~ 220-240V	16A	3350W	770	575	465	62kg
2 Group EX3 Display	1N ~ 220 - 240V	16A	3350W	770	575	465	62kg
3 Group EX3 Display	1N ~ 220 - 240V	20A	4350W	990	575	465	74kg

Preinstallation Check List	
Electrical supply within 1 metre and suitable for required load. (above 3000W is not suitable for 13A plug connection)	
15 mm Dedicated cold water supply within 1 metre with 3/4" washer tap.	
35mm Trapped Waste Under worktop within 1 metre	
Worktop area complete and with space for machine	
Space for grinder with 13A socket	
The electrical and water supplies are tested and working?	
Is there coffee and cups on site so the engineer can commission the machine?	
Preferred work surface height 900mm (only for optimum working)	
Has 50mm diameter hole been made through worktop for pipes/cables.	
Space for water filter under work top (see water filter dimensions on p2)	
Is someone on site to help engineer lift the machine.	
Work top capable of supporting weight	
Are there any site access issues that the engineer should be made aware of?	

Installation Deta	ils	Installation Confirmation				
Full install address:		1 1 "	d date the declaration below to confirm all the above is			
		If the engineer	idy. Return completed page back to us (post or email) can not install on arrival due to any of the above being installation charge will be become payable to cover the ises.			
Preferred install date	1 1	Signed:				
Contact name						
Contact telephone		Date:	1 1			
		_				

Welbilt reserves the right to make changes to the design or specifications without prior notice.

Welbilt UK Ltd
Ashbourne House, The Guildway
Old Portsmouth Road
Guildford, GU3 1LR
United Kingdom

Email: sales.uk@welbilt.com Tel: +44 (0) 1483 464 900

www.crem.coffee

